# ID Infinity Drain

NOT Site Sizable ™

Flow rate - 9 gpm per outlet

line to increase flow rates



## **FTAS 65 Series** Side Outlet

FTAS 6524 - 24" Complete Kit

- FTAS 6532 32" Complete Kit
- FTAS 6536 36" Complete Kit
- FTAS 6542 42" Complete Kit
- FTAS 6548 48" Complete Kit

### FTAS 6560 - 60" Complete Kit

Compatible with: liquid applied or fabric sheet membranes

for water in channel or sheeting on shower floor.


Flow rate measured at outlet only. Measurement does not account

Additional outlets can be added and combined into a larger waste

#### **Features**

- Centered side outlet
- Indoor or outdoor use
- 16 gauge, 304L stainless steel channel
- 12 gauge, 316L stainless steel grate
- Pre pitched channel
- Grate can be removed for cleaning

#### Installation

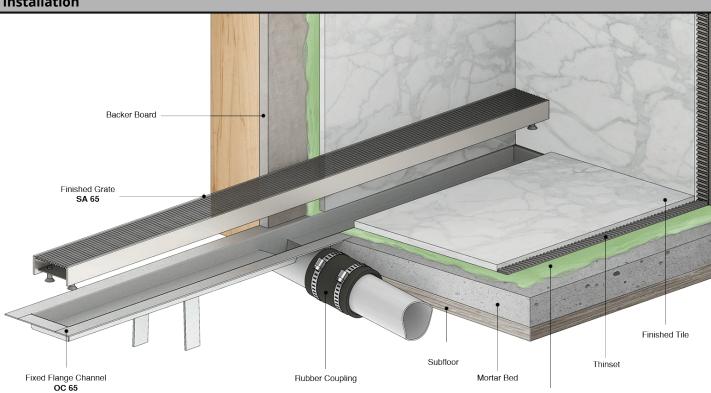


#### **Care & Maintenance**

FTAS 65 stainless steel linear drain top grates are made of 316L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite® may be needed. For Polished Stainless and other finishes we recommend a mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub® with Bleach, or Steel Brite®. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

**Infinity Drain** 


145 Dixon Avnue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinity Drain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

# ID Infinity Drain

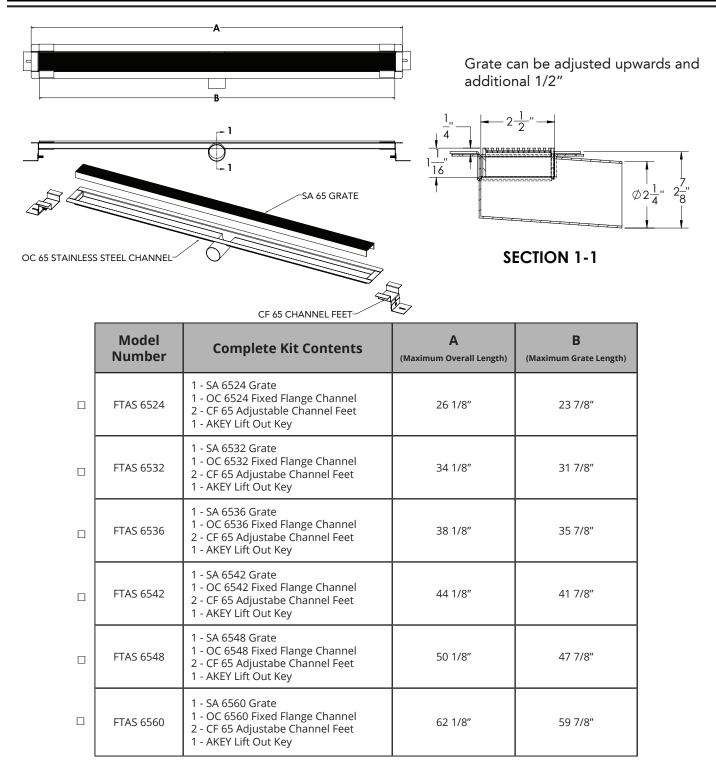

 Finishes

 □ Satin Stainless
 □ Polished Stainless
 □ Matte Black
 □ Matte White
 □ Satin Bronze

#### Infinity Drain

145 Dixon Avnue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinity Drain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

#### Infinity Drain $\supset$

### **FTAS 65 CUSTOM**

<b></b>	X
	Y3
🗆 Satin Stainless 🛛 🗆 Polished Stainless	□ Oil Rubbed Bronze □ Matte White □ Matte Black □ Sofin Bronze
X: LENGTH: Overall Inside Channel Dimension (inches): Desired finished dimension For lengths greater than 60", multiple grates are supplied, unless otherwise noted.	
Y: OUTLET LOCATION: # of outlets	Center of Outlet(s) to right edge: Y1 Y2 Y3
RUSH: Yes NO Rush charge applied per set-up. Turnaround is 7 business days, plus shipping. (Rush does not apply to some custom designs, please contact Infinity Drain for details)	
Customer:	Job Name:
Approved by:	Date:



FM047-08-17

**Infinity Drain** 145 Dixon Avnue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinity Drain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.